


Fix the ISSF safety flag at the end of the signal line by putting the line in the middle of the flag and press the two parts together.



Insert the signal line into your unloaded rifle/pistol through the chamber into the barrel and push it to the muzzle. (1)

To signalize that your rifle/pistol is unloaded pull the end of the signal line out of the muzzle. (2) and (3)

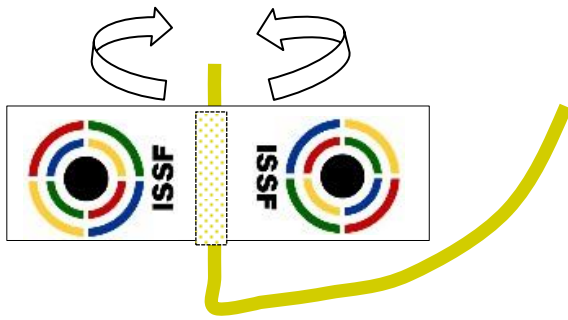